

# Fabry-Pérot Laser Diodes (FP): High-Power Option

## WAVELENGTH


- 760–840 nm
- 840–1100 nm
- 1100–1700 nm
- 1700–2400 nm
- 2400–2900 nm
- 2800–6500 nm
- 6000–14000 nm

## High-Power OPT

nanoplus FPs are specially designed and characterized to fit your requirements. For more than 20 years, nanoplus has been manufacturing DFB and FP lasers with excellent performance. Our devices operate **reliably** in more than 30,000 installations worldwide.

### Key features:

- BROADBAND
- HIGH-POWER
- SMALL FOOTPRINT

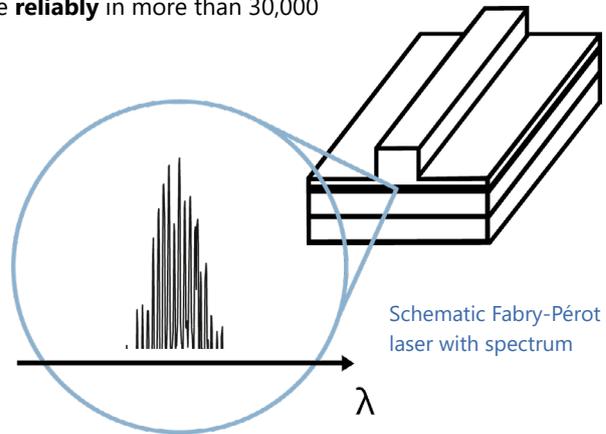


Schematic Fabry-Pérot laser with spectrum

Any **custom wavelength** is possible: You tell us what you need! With our outstanding technology we design any wavelength **between 1950 nm and 2350 nm** with an accuracy of +/- 20 nm. Other wavelengths are available on request.

The **output power** of **up to 1 W** yields a strong signal and gives large flexibility to your application. High power up to 1 W for diverse applications is available on request.

**Long-term stability** is one of the principal features customers value about our lasers! Even in **harsh environments** nanoplus devices perform excellently – low maintenance warranted.

**“Do not change your ideas, let us deliver a laser that fits your application.”**



nanoplus high-power Fabry-Pérot laser on submount with AlN carrier

If you require **custom specifications**, please contact us. Nearly 80 % of our devices are more or less customer-specific. As nanoplus is a **fully vertically integrated company**, we control the entire process chain from design to packaging. Both nanoplus production facilities are based in **Germany**. To guarantee consistent product quality we apply a strict and **ISO certified quality management system** at all levels.


Our sales and R&D teams have long-standing experience in developing lasers. They will be pleased to provide advice at any time - rely on us from design stage to product realization as well as after-sales:

**We make market leaders!**




# Typical Specifications: High-Power Option

This data sheet reports performance data of a **sample High-Power Fabry Pérot Laser at 2145 nm**, which is representative for all wavelengths between 1950 nm and 2350 nm with **high-power option**. For standard specifications with less power, please refer to our low power section: <https://www.nanoplus.com/FP/1700-2400nm>.

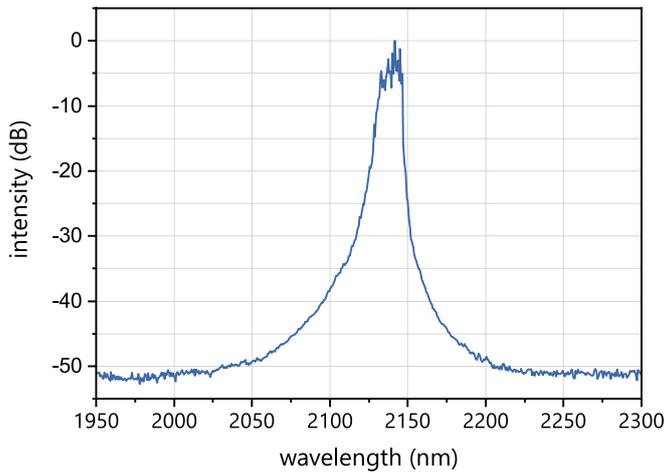

Typical room temperature cw spectrum of a nanoplus HPFP laser at 2145 nm

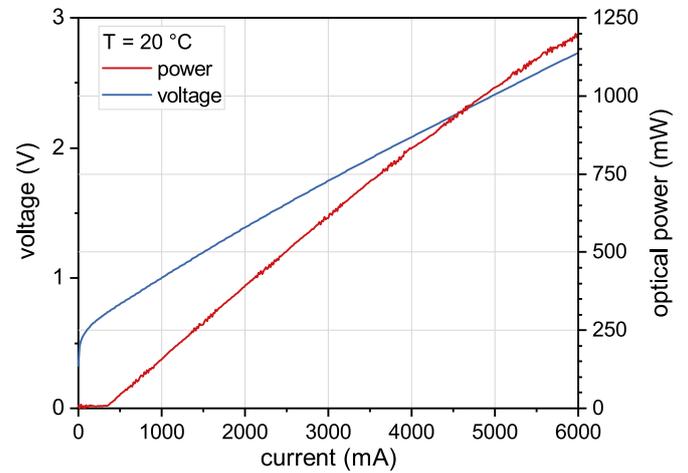

Typical PI and VI curve of a nanoplus HPFP laser at 2145 nm


electro-optical characteristics	symbol	unit	min.	typ	max.
operating wavelength (at $T_{op}$ , $I_{op}$ )	$\lambda_{op}$	nm	-20	please specify	+20
optical output power (at $\lambda_{op}$ )	$P_{op}$	mW		1000	
operating current	$I_{op}$	mA		5000	
operating voltage	$V_{op}$	V		2.5	
threshold current	$I_{th}$	mA		300	
operating case temperature*	$T_c$	°C	-20	+25	+50
storage temperature*	$T_s$	°C	-40	+20	+80

\* non condensing


## laser packaging options

submount with AlN carrier, without TEC, without NTC

Technical drawings & accessories are available at: <https://nanoplus.com/packaging-options>

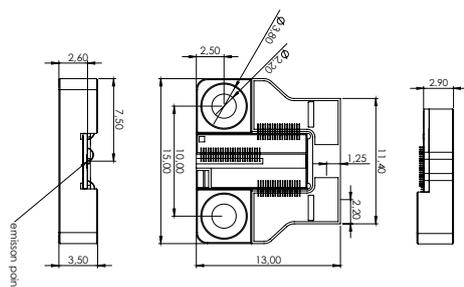

Technical drawing of submount with AlN carrier

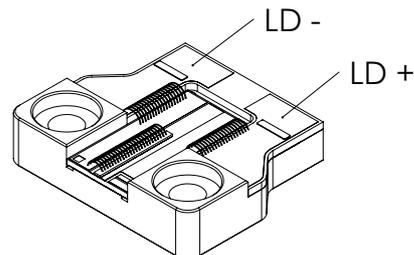

Please contact [sales@nanoplus.com](mailto:sales@nanoplus.com) for customized specifications, quotes and further questions. Visit our website for technical notes, application samples or literature referrals.